


Mounting distance for panelled wall – combustible material

Insulation ability such Aqua panel (coefficient of thermal conductivity 0,36 W/mk) or better.

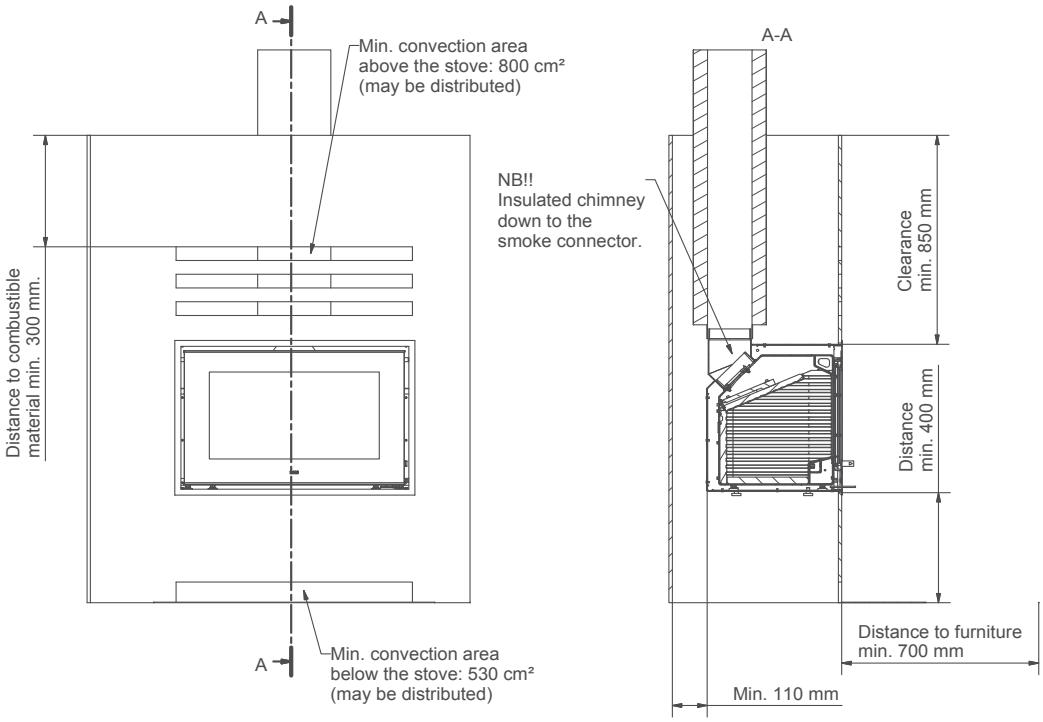


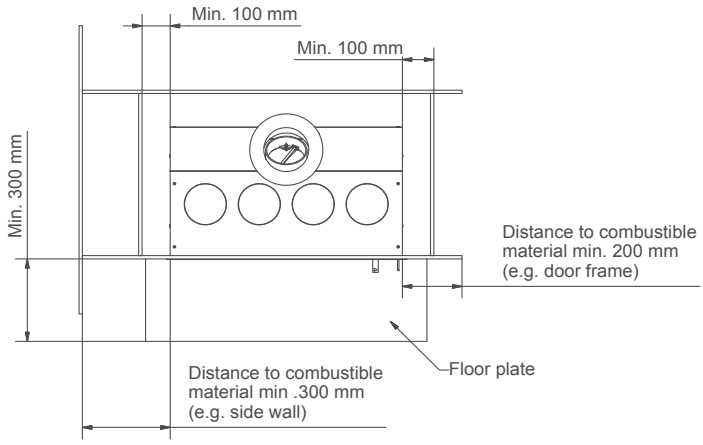

Mounting distance - super isol

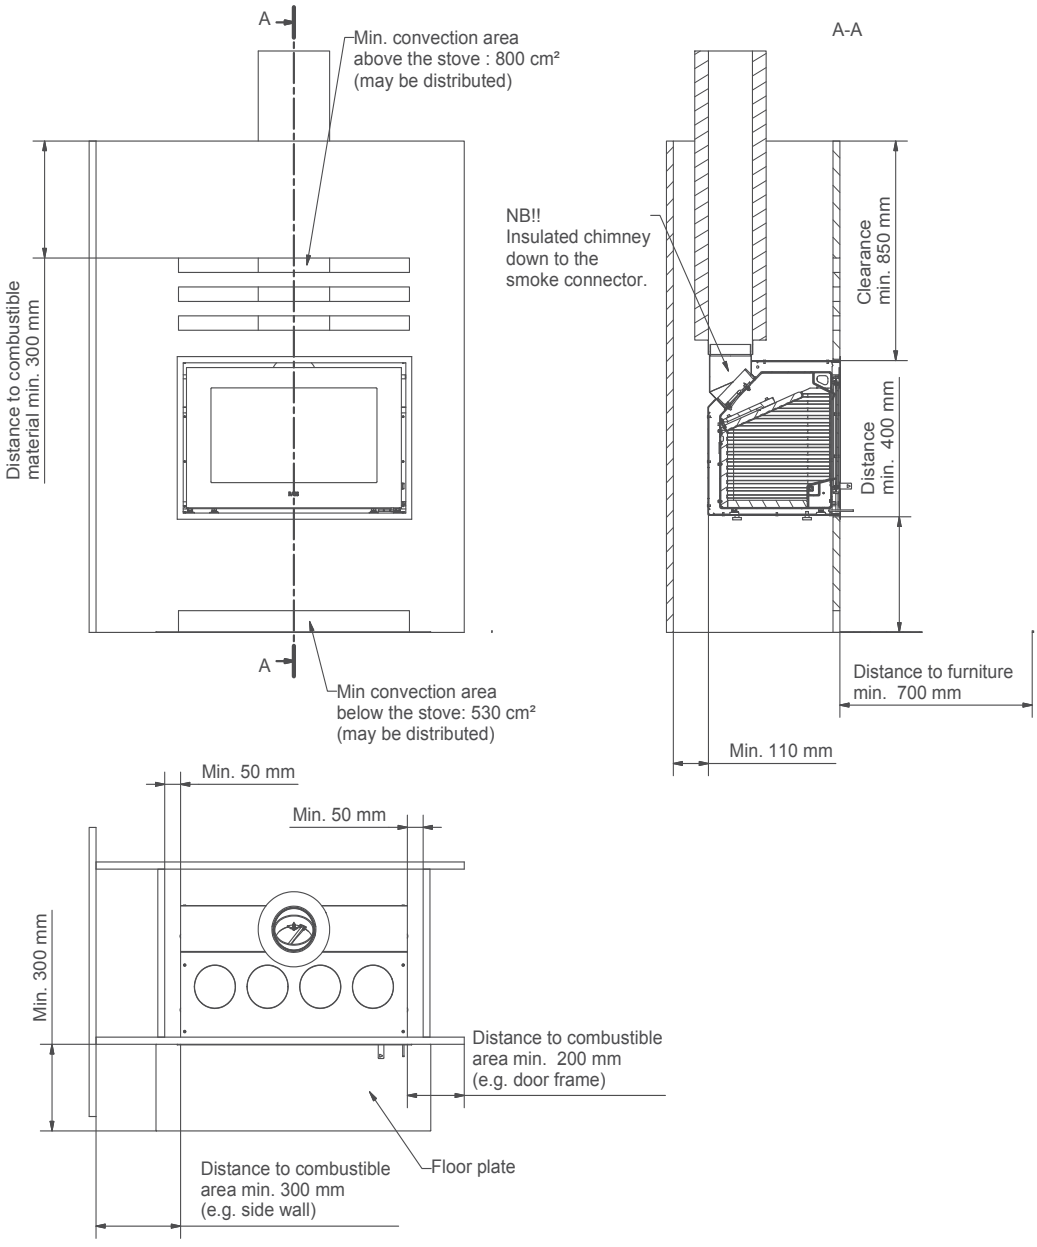


Mounting distance for brick wall / firewall

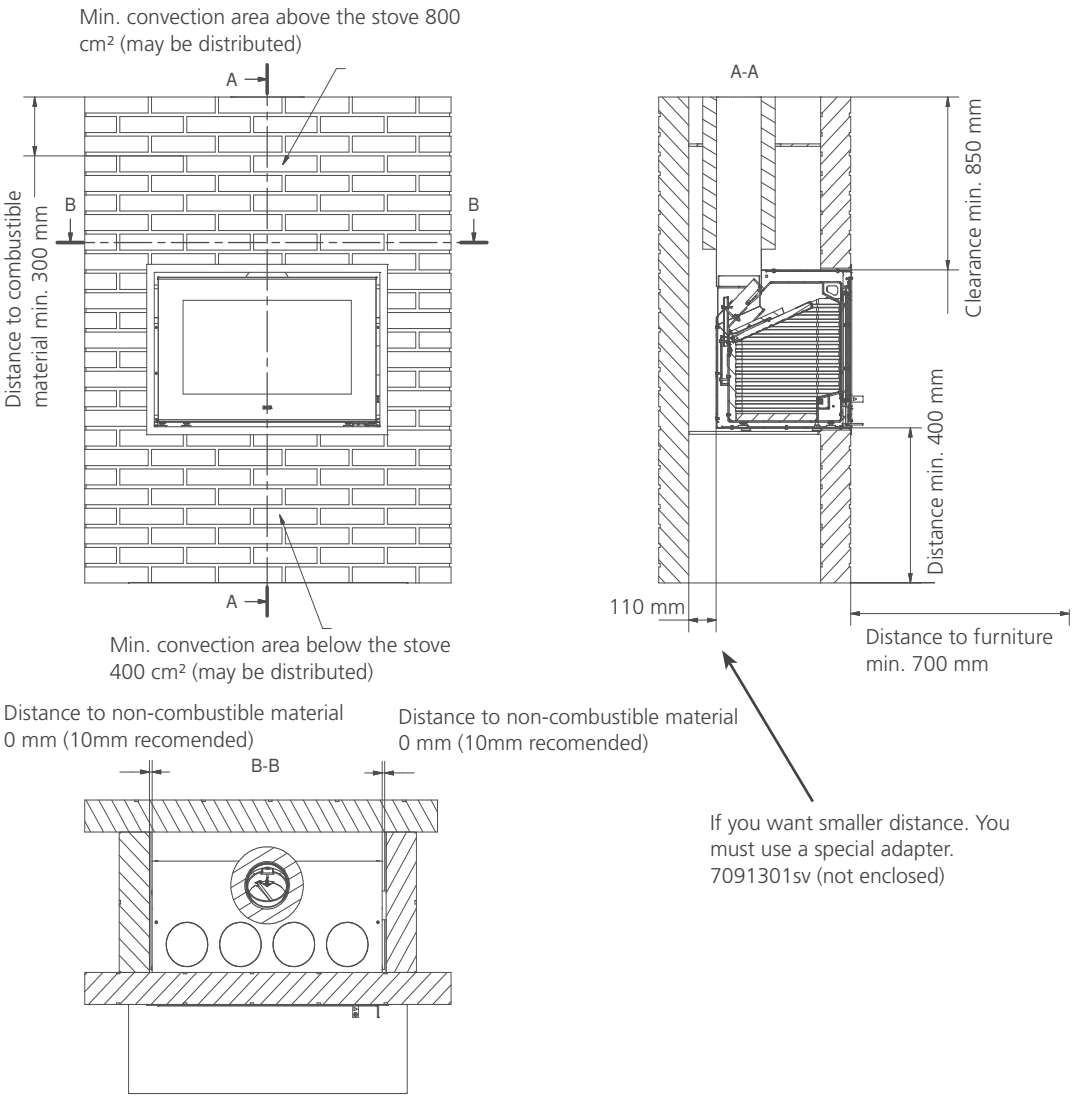


Mounting distance - (height x width) 545 x 840

A wood burner insert should never fit tightly. Steel expands when heated.

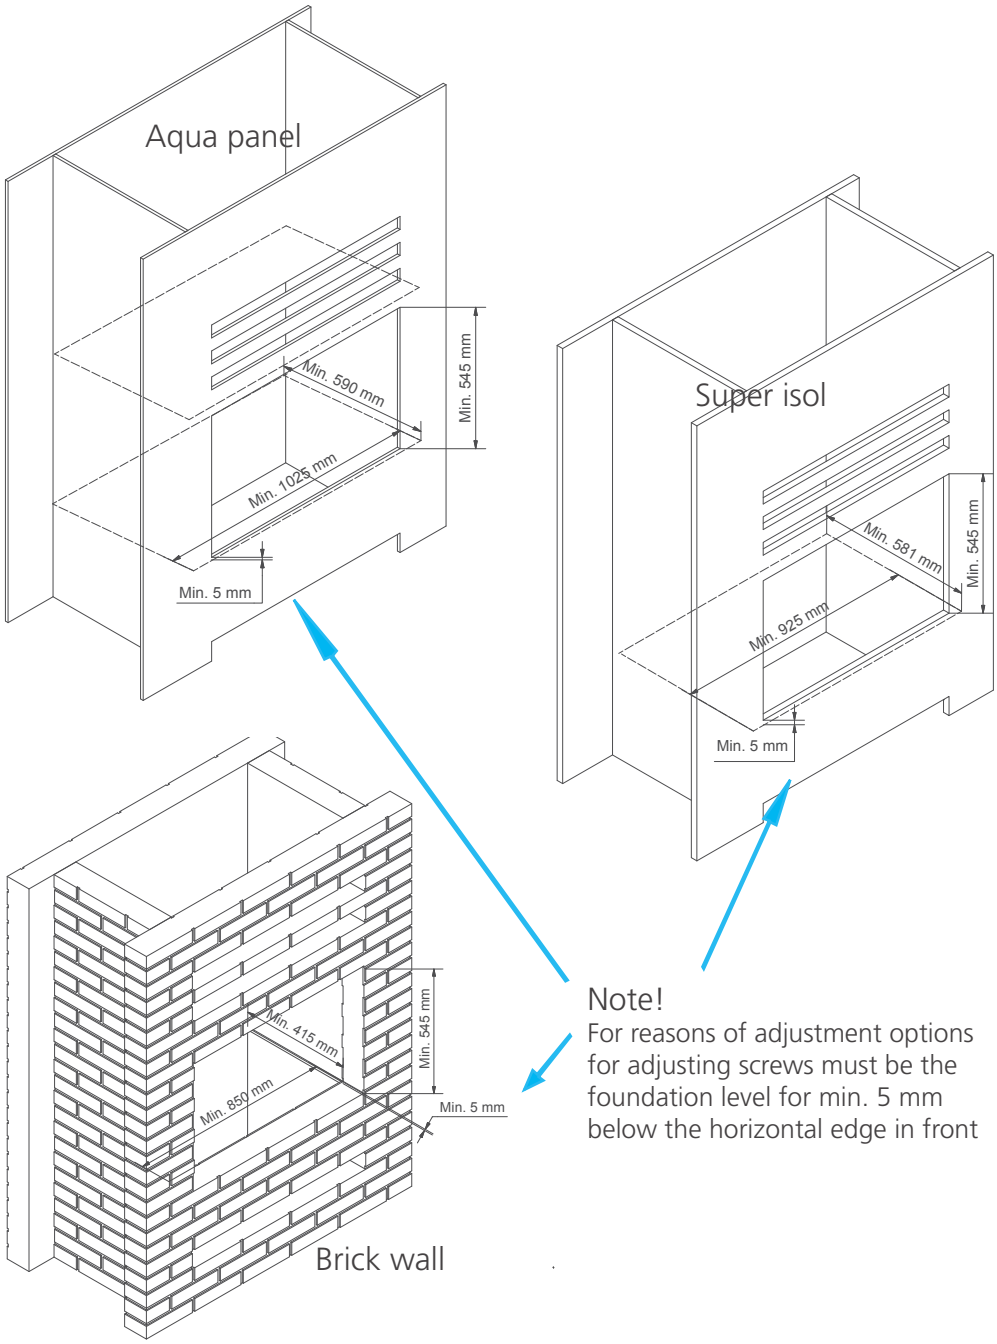

Note!

For reasons of adjustment options for adjusting screws must be the foundation level for min. 5 mm below the horizontal edge in front

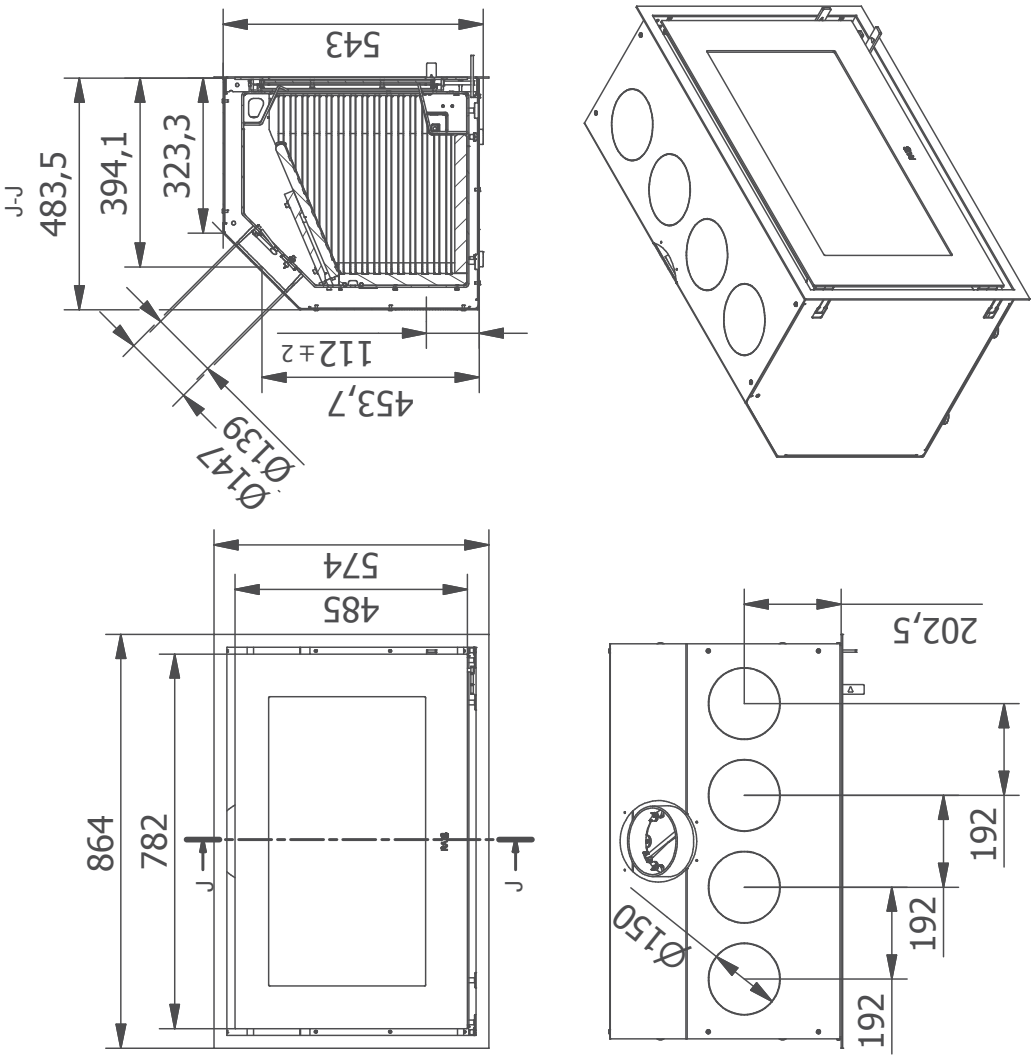
543
J-J
483,5
394,1
323,3
112±2
453,7
Ø147
Ø139
574
485
864
782
J
J
202,5
192
192
192
Ø150